

### 60Hz POWER RATINGS

Voltage AC	Phase	PF	Standby		Prime*	
			KW	A	Kw	A
277/480	3	0.8	1843	2771	1675	2519
347/600	3	0.8	1843	2217	1675	2015
2402/4160	3	0.8	1843	320	1675	291

\* Prime power rating for reference only.

## Overview of the SIMMAX series of Industrial Generator Sets

Simson-Maxwell generators are factory-built in facilities that utilize the latest technology, mechanical and electrical component assembly, production, and testing. Each model is the result of computer-aided design and modeling backed up by exhaustive prototype-testing. Our development technology results in a unique range of innovative designs for highly reliable generator sets backed-up by a comprehensive warranty covering all components.

## Standard Configuration of Industrial Sets

- Long-life, heavy-duty, 4-cycle, direct injection diesel engine from a world-renowned manufacturer for economy of operation and maximum reliability and durability. Capable of full-rated load acceptance in one step.
- Cooling: Radiator with belt driven pusher fan.
- Filtration: Heavy duty replaceable element air-cleaner.
- Alternator: Single bearing, 4-pole, rotating field, self-excited, self-ventilated, 12-wire re-connectable (6-wire dedicated for 600V), 60Hz brushless alternator with Class H insulation. Automatic voltage regulator (AVR) providing close voltage regulation.
- Arrangement: Open skid with engine and alternator units close coupled together and with seismic anti-vibration isolators mounted between the assembly and a heavy-duty steel base. Lifting lugs are provided as per application.
- Auto Start Control Panel: Digital auto-start microprocessor based control panel with remote start capability.
- Starting System: Electric starter motor, battery cables, battery and belt driven charging alternator.
- CSA certified and meets CSA C282 requirements.



### ENGINE SPECIFICATION

Manufacturer	MTU
Model	12V4000G83
EPA certified	Tier-2
Crank shaft speed: rpm	1800
Fuel type	Diesel
Injection	Direct
Aspiration	Turbocharged
Number of cylinder	12
Cylinder arrangement	90°V
Displacement: L	57.2
Bore: mm	170
Stroke: mm	210
Engine standby power: kW	1910.0
Engine prime power: kW	1736.0
Cooling	Water cooled
Governor	Electronic
Starting motor voltage	24V DC
Compression ration	16.5:1
Air cleaner type	Heavy Duty Air Filter

### EXHAUST SYSTEM

Maximum engine exhaust temperature: °F (°C)	824 ( 440 )
Exhaust gas flow: CFM (m3/hr)	12501.0 ( 21239.4 )
Max. permissible back pressure: PSI (kPA)	1.233 ( 8.5 )

### COOLING SYSTEM

Radiator cooling air flow: CFM (m3/hr)	55587 ( 94443 )	@Max 40°C ambient temperature
Max. restriction of cooling air: in.w.g. (kPA)	0.483 ( 0.2 )	
Engine combustion air flow: CFM (m3/hr)	5086 ( 8642 )	
Total intake air requirement: CFM (m3/hr)	60673 ( 103084.1 )	
Total coolant capacity: Litre	583	

### HEAT BALANCE

Heat at rejection to coolant: kW	700.0
Heat at rejection radiation from engine: kW	75.0
Heat at rejection to engine exhaust: kW	TBA

### LUBRICATION SYSTEM

Oil pan capacity: Litre	200.0
Oil pan capacity with filter: Litre	260.0
Oil cooler	Integrated full flow
Recommended lubricating oil grade	S10 W40
Oil consumption at full load: Litre/hr	4.66
Oil pressure: PSI (kPA)	79.8 ( 550 )

# SIMMAX



**POWER  
GENERATION**

## DIESEL PRODUCT LINE

**SMTW1750 T6-T2**

120/240/208/480/600 Volts

60 Hz/1800 RPM | Standby/Prime

### ENGINE ELECTRICAL SYSTEM

Starting motor voltage	24V DC
Battery capacity	2X8D, 24V, 1500A
Cranking Amps minimum	1600

### FUEL SYSTEM

Recommended fuel	EN 590, Grade No.1-D/2-D (ASTM D975-00)
Fuel supply line, min. ID: mm	25.0
Fuel return line min. ID: mm	25.0
Fuel supply line max. restriction: kpa	12.5
Fuel pump type	Engine-driven
Fuel filter	0.005mm Fuel Filter

### FUEL CONSUMPTION

	Standby Power		Prime Power
100% Load Standby: Litre/hr	466.0	100% Load Prime: Litre/hr	423.6
75% Load Standby: Litre/hr	352.0	75% Load Prime: Litre/hr	320.0
50% Load Standby: Litre/hr	246.0	50% Load Prime: Litre/hr	223.6
25% Load Standby: Litre/hr	-	25% Load Prime: Litre/hr	-

### ALTERNATOR SPECIFICATION

Alternator manufacturer	STAMFORD
Alternator model	PI734
Voltage	480V, 600V
Alternator type	Four pole, Rotating field
Excitation system	Brushless, PMG (MX321)
Power factor	0.8
Number of leads	6 leads dedicated (277V-480V), 6 leads dedicated (600V)
Stator pitch	2/3
Insulation	Class H
Windings - temperature rise / Ambient °C	125 / 40
Enclosure rating	IP23
Bearing	Single, Sealed
Amortisseur windings	Full
Voltage regulation - no load to full load with DSR AVR	± 0.5%
TIF	<50
Line harmonics	5% MAXIMUM
Alternator cooling air flow: CFM (m3/hr)	7300 ( 12403 )

### STANDARD FEATURES

• Radiator with pusher fan	• Standard fuel filter
• Medium-duty, Heavy Duty Air Filter	• All rotating components protected with metal guards
• Heavy-duty engine start batteries with cables	• Operation and installation literature
• Emergency stop switch	• CSA certified
• Control Panel (See next page for details)	• Steel base for mounting on fuel tank/concrete surface

### OPTIONAL FEATURE: SUB-BASE FUEL TANK \*

Runtime	24 hour	48 hour	72 hour
Tank volume - US gal (L)	2954.5 (11184)	5909 (22368)	8863.5 (33552)
Tank size: L x W x H - inch	244 x 105 x 31	276 x 129 x 40	276 x 192 x 40
Tank size: L x W x H - m	6.2 x 2.7 x 0.8	7 x 3.3 x 1	7 x 4.9 x 1

\* All measurements are approximate and for estimation purposes only. The tank dimensions may vary. For specific sizes, contact sales representative.

Rev: A

Date: 3/29/2018



### Control Systems Standard Features - Generator Digital Control Panel

#### Standard Configuration of Control Systems

- Numerous control systems available, depending on customer requirements
- Automatic or manual start/stop
- Pre-lube function with timers
- Adjustable crank attempts
- Engine warm up/cooling functions
- Digital metering with alarms and shutdowns
- LCD display
- LED indicators
- In-built PLC function
- RS232 (optional RS485 or CAN) communication
- Data logging up to 350 events
- Password protection



### Key dimensions and Weights

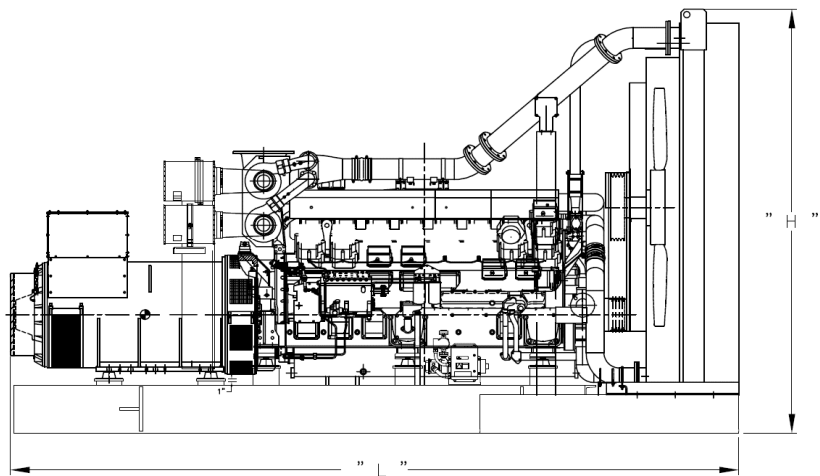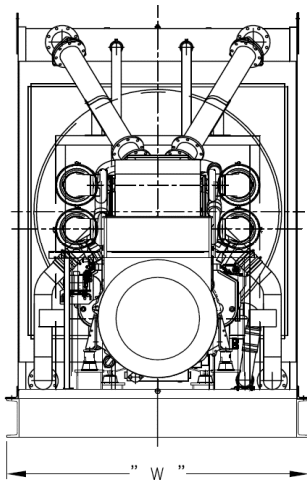

#### GENERATOR DATA \*

L = LENGTH - inch (mm)	W = WIDTH - inch (mm)	H = HEIGHT - inch (mm)	DRY WEIGHT - lbs (kg)
243 ( 6172.2 )	104 ( 2641.6 )	120.0 ( 3048 )	29757.0 ( 13495.3 )

\* All measurements are approximate and for estimation purposes only. Images are reference only.  
 Any deviation can change dimensions.  
 Materials and specifications subject to change without notice.



Simson Maxwell

Calgary | Edmonton | Nanaimo | Port Coquitlam | Prince George | Terrace | Ft. St. John

www.simson-maxwell.com | 800-374-6766

