

60Hz POWER RATINGS

Voltage AC	Phase	PF	Standby		Prime*	
			KW	A	Kw	A
120/208	3	0.8	854	2963	778	2700
120/240	3	0.8	854	2568	778	2340
277/480	3	0.8	857	1288	781	1174
347/600	3	0.8	852	1025	777	934

* Prime power rating for reference only.

Overview of the SIMMAX series of Industrial Generator Sets

Simson-Maxwell generators are factory-built in facilities that utilize the latest technology, mechanical and electrical component assembly, production, and testing. Each model is the result of computer-aided design and modeling backed up by exhaustive prototype-testing. Our development technology results in a unique range of innovative designs for highly reliable generator sets backed-up by a comprehensive warranty covering all components.

Standard Configuration of Industrial Sets

- Long-life, heavy-duty, 4-cycle, direct injection diesel engine from a world-renowned manufacturer for economy of operation and maximum reliability and durability. Capable of full-rated load acceptance in one step.
- Cooling: Radiator with belt driven pusher fan.
- Filtration: Heavy duty replaceable element air-cleaner.
- Alternator: Single bearing, 4-pole, rotating field, self-excited, self-ventilated, 12-wire re-connectable (6-wire dedicated for 600V), 60Hz brushless alternator with Class H insulation. Automatic voltage regulator (AVR) providing close voltage regulation.
- Arrangement: Open skid with engine and alternator units close coupled together and with seismic anti-vibration isolators mounted between the assembly and a heavy-duty steel base. Lifting lugs are provided as per application.
- Auto Start Control Panel: Digital auto-start microprocessor based control panel with remote start capability.
- Starting System: Electric starter motor, battery cables, battery and belt driven charging alternator.
- CSA certified and meets CSA C282 requirements.

ENGINE SPECIFICATION

Manufacturer	Mitsubishi
Model	S12A2Y2PTAW-2
EPA certified	Tier-2
Crank shaft speed: rpm	1800
Fuel type	Diesel
Injection	Direct
Aspiration	Turbocharged
Number of cylinder	12
Cylinder arrangement	60°V
Displacement: L	33.93
Bore: mm	150
Stroke: mm	160
Engine standby power: kW	900.0
Engine prime power: kW	820.0
Cooling	Water cooled
Governor	Woodward PROACT-II
Starting motor voltage	24V DC
Compression ration	15.3:1
Air cleaner type	Not Included

EXHAUST SYSTEM

Maximum engine exhaust temperature: °F (°C)	883.4 (473)
Exhaust gas flow: CFM (m3/hr)	8192.0 (13918.3)
Max. permissible back pressure: PSI (kPA)	0.856 (5.9)

COOLING SYSTEM

Radiator cooling air flow: CFM (m3/hr)	37314 (63397)	@Max 40°C ambient temperature
Max. restriction of cooling air: in.w.g. (kPA)	0.483 (0.2)	
Engine combustion air flow: CFM (m3/hr)	3107 (5279)	
Total intake air requirement: CFM (m3/hr)	40421 (68675.8)	
Total coolant capacity: Litre	107.3	

HEAT BALANCE

Heat at rejection to coolant: kW	642.0
Heat at rejection radiation from engine: kW	139.0
Heat at rejection to engine exhaust: kW	947.0

LUBRICATION SYSTEM

Oil pan capacity: Litre	110.0
Oil pan capacity with filter: Litre	120.0
Oil cooler	Water cooled, Multi plate type cooler
Recommended lubricating oil grade	Class CD or CF oil (As per API)
Oil consumption at full load: Litre/hr	2.47
Oil pressure: PSI (kPA)	87.1 (600)

SIMMAX



**POWER
GENERATION**

DIESEL PRODUCT LINE

SMW800 T6-T2

120/240/208/480/600 Volts

60 Hz/1800 RPM | Standby/Prime

ENGINE ELECTRICAL SYSTEM

Starting motor voltage	24V DC
Battery capacity	2X8D, 24V, 1500A
Cranking Amps minimum	1250 A at -17.8°C

FUEL SYSTEM

Recommended fuel	ASTM D975 No. 1-D, No. 2-D
Fuel supply line, min. ID: mm	25.0
Fuel return line min. ID: mm	25.0
Fuel supply line max. restriction: kpa	10
Fuel pump type	Engine driven gear pump
Fuel filter	Primary: Wire element Secondary: Paper element

FUEL CONSUMPTION

	Standby Power		Prime Power
100% Load Standby: Litre/hr	247.0	100% Load Prime: Litre/hr	224.5
75% Load Standby: Litre/hr	175.0	75% Load Prime: Litre/hr	159.1
50% Load Standby: Litre/hr	119.0	50% Load Prime: Litre/hr	108.2
25% Load Standby: Litre/hr	67.0	25% Load Prime: Litre/hr	60.9

ALTERNATOR SPECIFICATION

Alternator manufacturer	STAMFORD
Alternator model	HCI634
Voltage	120V - 480V, 600V
Alternator type	Four pole, Rotating field
Excitation system	Brushless, PMG (MX321)
Power factor	0.8
Number of leads	12 leads reconnectable (120V-480V), 6 leads dedicated (600V)
Stator pitch	2/3
Insulation	Class H
Windings - temperature rise / Ambient °C	125 / 40
Enclosure rating	IP23
Bearing	Single, Sealed
Amortisseur windings	Full
Voltage regulation - no load to full load with DSR AVR	± 0.5%
TIF	<50
Line harmonics	5% MAXIMUM
Alternator cooling air flow: CFM (m3/hr)	4156 (7062)

STANDARD FEATURES

• Radiator with pusher fan	• Standard fuel filter
• Medium-duty, Not Included	• All rotating components protected with metal guards
• Heavy-duty engine start batteries with cables	• Operation and installation literature
• Emergency stop switch	• CSA certified
• Control Panel (See next page for details)	• Steel base for mounting on fuel tank/concrete surface

OPTIONAL FEATURE: SUB-BASE FUEL TANK *

Runtime	24 hour	48 hour	72 hour
Tank volume - US gal (L)	1566 (5928)	3132 (11856)	4698 (17784)
Tank size: L x W x H - inch	176 x 70 x 34	197 x 97 x 40	197 x 144 x 40
Tank size: L x W x H - m	4.5 x 1.8 x 0.9	5 x 2.5 x 1	5 x 3.7 x 1

* All measurements are approximate and for estimation purposes only. The tank dimensions may vary. For specific sizes, contact sales representative.

Rev: A

Date: 3/29/2018


Control Systems Standard Features - Generator Digital Control Panel

Standard Configuration of Control Systems

- Numerous control systems available, depending on customer requirements
- Automatic or manual start/stop
- Pre-lube function with timers
- Adjustable crank attempts
- Engine warm up/cooling functions
- Digital metering with alarms and shutdowns
- LCD display
- LED indicators
- In-built PLC function
- RS232 (optional RS485 or CAN) communication
- Data logging up to 350 events
- Password protection



Key dimensions and Weights

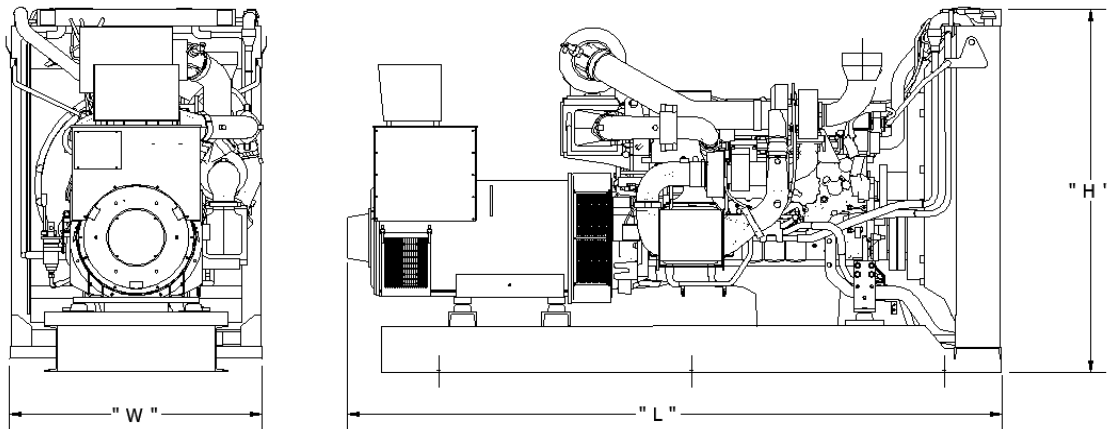

GENERATOR DATA *

L = LENGTH - inch (mm)	W = WIDTH - inch (mm)	H = HEIGHT - inch (mm)	DRY WEIGHT - lbs (kg)
175 (4445)	69 (1752.6)	98.0 (2489.2)	16195.7 (7345)

* All measurements are approximate and for estimation purposes only. Images are reference only.
Any deviation can change dimensions.
Materials and specifications subject to change without notice.



Simson Maxwell

Calgary | Edmonton | Nanaimo | Port Coquitlam | Prince George | Terrace | Ft. St. John

www.simson-maxwell.com | 800-374-6766

